

BIT25

Air-water heat exchangers for roof installation

OSK 605

COOLING CAPACITY

2500 W




Accessories


Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BIT25BX0B	BIT25CX0B
Cooling capacity - W10A35	W	2500	2500
Water flow rate	l/h	500	500
Power supply	V - Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	400	400
Height	mm	270	270
Depth	mm	540	540
Max current	A	0.30	0.62
T Fuse	A	2	2
Power draw - W10A35	W	65	67
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water
Max liquid circuit pressure	bar	10	10
Water connection	-	1/2"G	1/2"G
Air flow rate	m ³ /h	750	750
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
IP rating EN60529	-	IP55	IP55
Noise level	dB (A)	58	58
Weight	kg	19	19
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

Performance

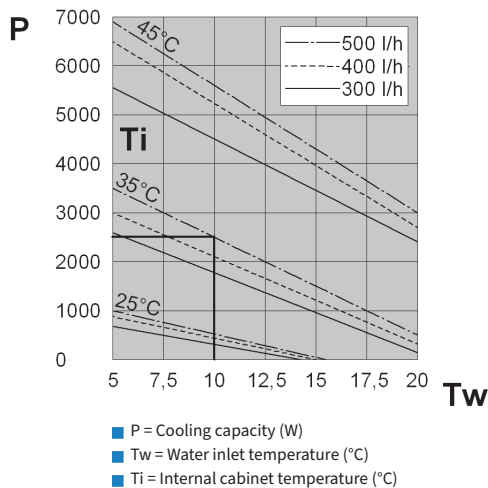

Dimensions

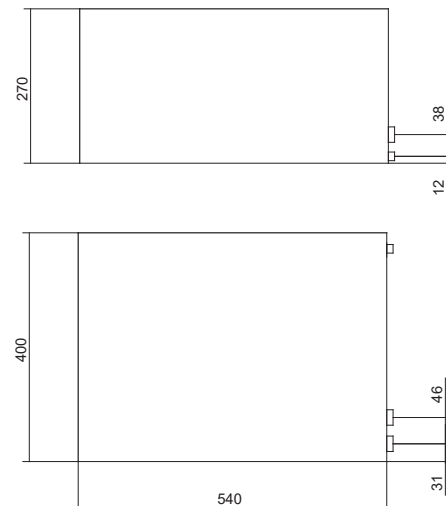

25.06.2021