

BLU25


Air-water heat exchangers for door or wall installation

OSK 625

COOLING CAPACITY

2500 W




Features	UoM	BLU25BX0B	BLU25BXUB	BLU25CX0B
Cooling capacity - W10A35	W	2500	2500	2500
Water flow rate	l/h	500	500	500
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60
Width	mm	398	398	398
Height	mm	901	901	901
Depth	mm	137	137	137
Max current	A	0.33	0.60	0.74
T Fuse	A	2	2	2
Power draw - W10A35	W	80	100	82
Operating cycle	-	100%	100%	100%
Electrical connection		Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water
Max liquid circuit pressure	bar	10	10	10
Water connection	-	1/2"G	1/2"G	1/2"G
Air flow rate	m ³ /h	860	860	860
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-70	1-60	1-70
IP rating EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	58	58	58
Weight	kg	19	19	19
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE 	CE


Accessories

Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Performance

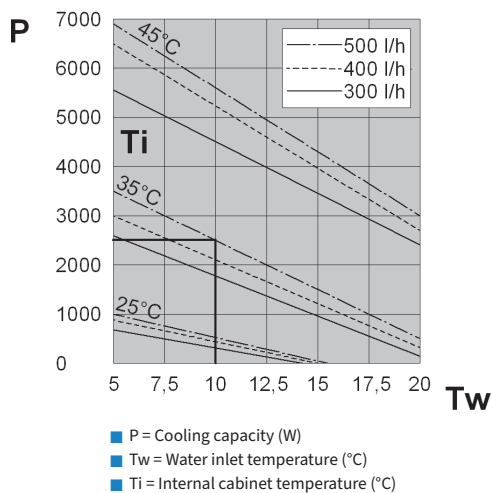

Dimensions

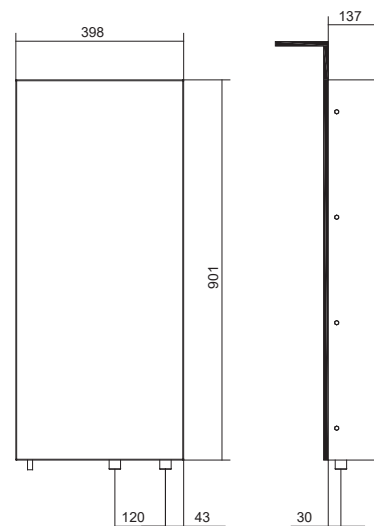

25.06.2021