

BLUA5

Air-water heat exchangers for door or wall installation

OSK 685

COOLING CAPACITY

15000 W




Accessories


| | |
|------------------------------------|-----------|
| Thermostat 20-46°C, gas bulb 15A | C16000002 |
| Solenoid valve, NC | C15000120 |
| Level indicator, NO | C16000140 |
| External stainless-steel framework | |
| Coating in non-standard colour | |

| Features | UoM | BLUA5BX0B | BLUA5GX0B |
|-----------------------------|-------------------|--------------------------|------------------|
| Cooling capacity - W10A35 | W | 15000 | 15000 |
| Water capacity | l/h | 2000 | 2000 |
| Power supply | V ~ Hz | 230 1~ 50-60 | 400/440 2~ 50-60 |
| Width | mm | 797 | 797 |
| Height | mm | 1935 | 1935 |
| Depth | mm | 206 | 206 |
| Max current | A | 1.40 | 0.90 |
| T Fuse | A | 4 | 2 |
| Power draw - W10A35 | W | 320 | 340 |
| Operating cycle | - | 100% | 100% |
| Electrical connection | - | Cable L = 3 m | Cable L = 3 m |
| Type of Refrigerant | - | Water | Water |
| Max liquid circuit pressure | bar | 10 | 10 |
| Water connection | - | 3/4"G | 3/4"G |
| Air flow rate | m ³ /h | 2900 | 2900 |
| Internal temperature range | °C | 20-60 | 20-60 |
| External temperature range | °C | 1-70 | 1-70 |
| IP rating EN60529 | - | IP55 | IP55 |
| Noise level | dB (A) | 72 | 70 |
| Weight | kg | 92 | 92 |
| Colour | - | RAL 7035 embossed effect | |
| Conformity | - | CE | CE |

Performance

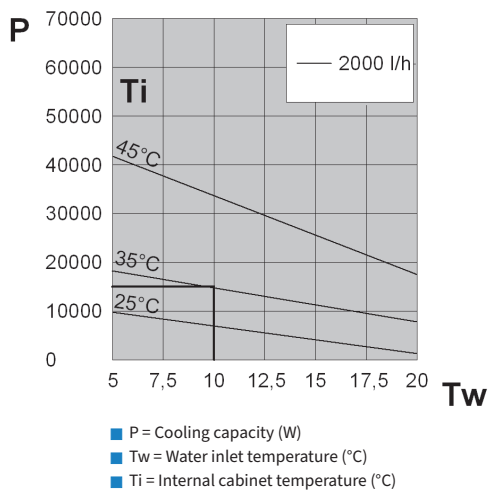

Dimensions

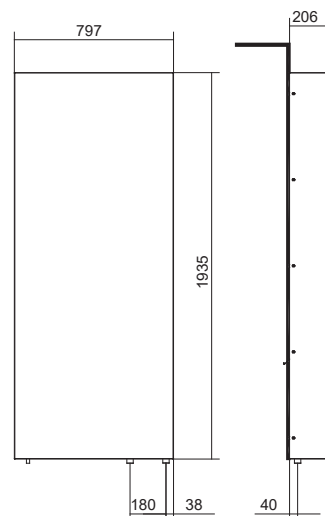

25.06.2021