


BLUB5

Air-water heat exchangers for door or wall installation

OSK 690

COOLING CAPACITY

25000 W

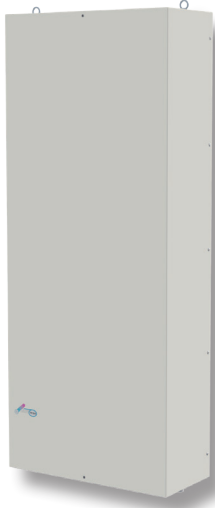


Accessories


Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000120
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BLUB5BX0B	BLUB5KX0B
Cooling capacity - W10A35	W	25000	25000
Water flow rate	l/h	2000	2000
Power supply	V ~ Hz	230 1~ 50-60	400/460 2~ 50-60
Width	mm	797	797
Height	mm	1935	1935
Depth	mm	350	350
Max current	A	2.20	1.30
T Fuse	A	4	2
Power draw - W10A35	W	500	530
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water
Max liquid circuit pressure	bar	10	10
Water connection	-	3/4"G	3/4"G
Air flow rate	m ³ /h	5200	5200
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
IP rating EN60529	-	IP55	IP55
Noise level	dB (A)	75	75
Weight	kg	120	120
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

Performance

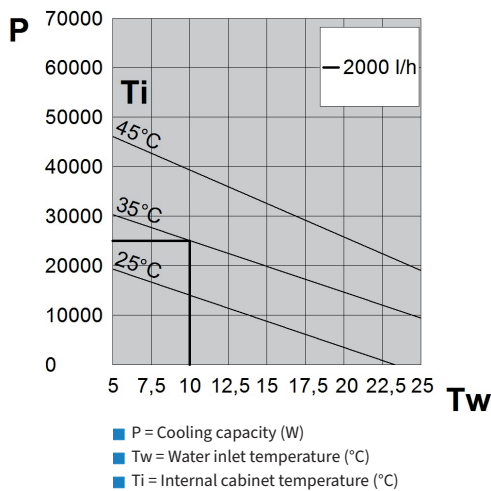

Dimensions

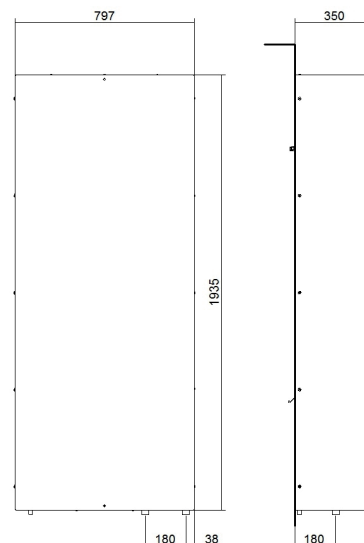

25.06.2021