


# NXT06


## Door- or wall-mount air conditioners

COOLING CAPACITY 720 W

### DIMENSIONS

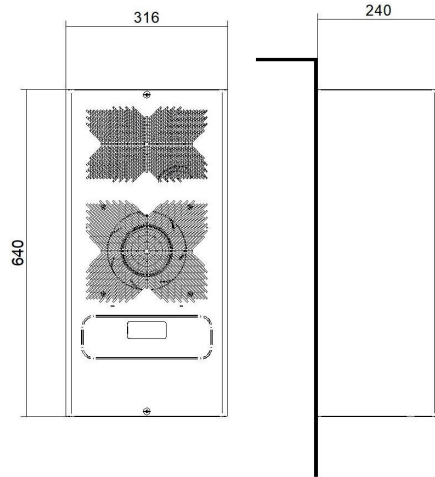

### PERFORMANCE

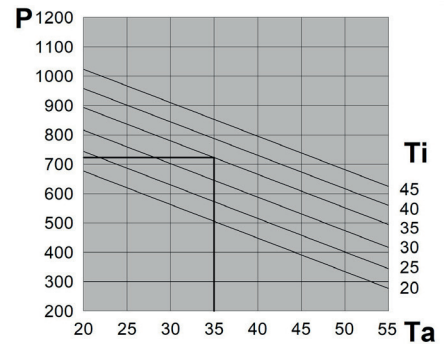

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Features	UoM	NXT06B0E1C0000	NXT06K0E1C0000	NXT06B0E1U0000	NXT06C0E1U0000	NXT06V0E1C00000
Cooling capacity EN14511 - A35A35	W	720	720	720	720	720
Cooling capacity EN14511 - A35A50	W	555	555	555	555	555
Power supply	V ~ Hz	230 - 1 - 50/60	400/460 - 2 - 50/60	230 - 1 - 50/60	115 - 1 - 50/60	48VDC
Width - Height - Depth	mm	316 - 640 - 240	316 - 640 - 240	316 - 640 - 240	316 - 640 - 240	316 - 640 - 240
Max current	A	2.3	1.3	2.3	4.6	5.8
Inrush current	A	10.9	6.3	10.9	22.2	-
T Fuse	A	6	4	6	8	10
Power draw EN14511 - A35A35	W	380	380	380	380	280
Power draw EN14511 - A35A50	W	450	450	450	450	350
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m <sup>3</sup> /h	305	305	305	305	305
Internal temperature range	°C	20-45	20-45	20-45	20-45	20-45
Temperature regulation	-	TX-i40 electronic thermostat factory set to 35°C				
External temperature range	°C	20-55	20-55	20-55	20-55	20-55
Ingress protection cabinet side	-	IP55	IP55	NEMA TYPE 12	NEMA TYPE 12	IP55
Noise level	dB (A)	65	65	65	65	65
Weight	kg	24	25	24	24	24
Conformity	-	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC