


NXT10


Door- or wall-mount air conditioners

COOLING CAPACITY 1000 W

DIMENSIONS

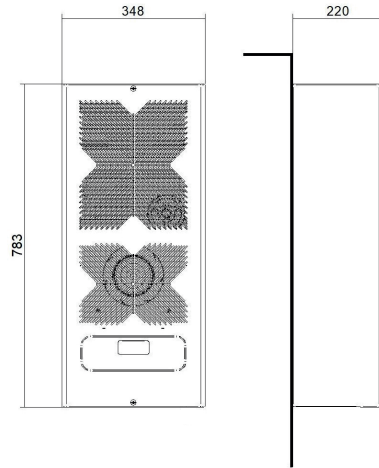

PERFORMANCE

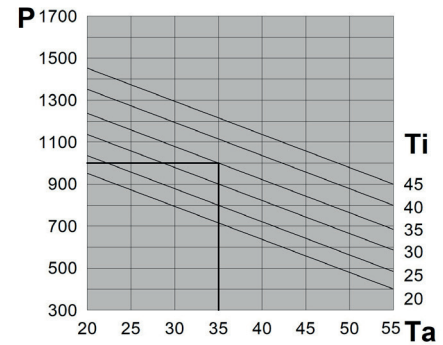

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Features	UoM	NXT10B0E1C0000	NXT10K0E1C0000	NXT10B0E1U0000	NXT10C0E1U0000	NXT10K0E1U0000
Cooling capacity EN14511 - A35A35	W	1000	1000	1000	1000	1000
Cooling capacity EN14511 - A35A50	W	760	760	760	760	760
Power supply	V ~ Hz	230 - 1 - 50/60	400/460 - 2 - 50/60	230 - 1 - 50/60	115 - 1 - 50/60	400/460 - 2 - 50/60
Width - Height - Depth	mm	348 - 783 - 220	348 - 783 - 220	348 - 783 - 220	348 - 783 - 220	348 - 783 - 220
Max current	A	3	1.7	3	6	1.4
Inrush current	A	13.1	7.5	13.1	28	7.4
T Fuse	A	6	4	6	10	4
Power draw EN14511 - A35A35	W	500	500	500	500	500
Power draw EN14511 - A35A50	W	600	600	600	600	600
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m ³ /h	540	540	540	540	305
Internal temperature range	°C	20-45	20-45	20-45	20-45	20-45
Temperature regulation	-	TX-i40 electronic thermostat factory set to 35°C				
External temperature range	°C	20-55	20-55	20-55	20-55	20-55
Ingress protection cabinet side	-	IP55	IP55	NEMA TYPE 12	NEMA TYPE 12	NEMA TYPE 12
Noise level	dB (A)	65	65	65	65	65
Weight	kg	27	28	27	27	28
Conformity	-	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC