


NXT12

Door- or wall-mount air conditioners


COOLING CAPACITY

1250 W

DIMENSIONS

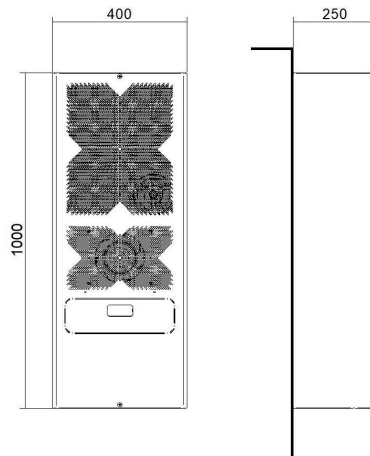

PERFORMANCE

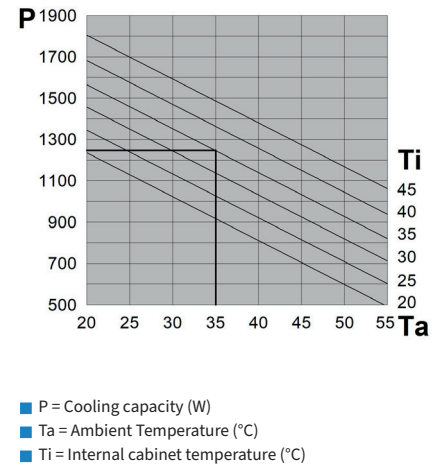

Features	UoM	NXT12B0E1C0000	NXT12K0E1C0000	NXT12B0E1U0000	NXT12C0E1U0000	NXT12K0E1U0000
Cooling capacity EN14511 - A35A35	W	1250	1250	1250	1250	1250
Cooling capacity EN14511 - A35A50	W	930	930	930	930	930
Power supply	V ~ Hz	230 - 1 - 50/60	400/460 - 2 - 50/60	230 - 1 - 50/60	115 - 1 - 50/60	400/460 - 2 - 50/60
Width - Height - Depth	mm	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250
Max current	A	3.2	1.8	3.2	6.4	1.8
Inrush current	A	17.1	9.8	17.1	28	9.8
T Fuse	A	6	4	6	10	4
Power draw EN14511 - A35A35	W	590	590	590	590	590
Power draw EN14511 - A35A50	W	680	680	680	680	680
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m ³ /h	540	540	540	540	540
Internal temperature range	°C	20-45	20-45	20-45	20-45	20-45
Temperature regulation	-	TX-i40 electronic thermostat factory set to 35°C				
External temperature range	°C	20-55	20-55	20-55	20-55	20-55
Ingress protection cabinet side	-	IP55	IP55	NEMA TYPE 12	NEMA TYPE 12	NEMA TYPE 12
Noise level	dB (A)	65	65	65	65	65
Weight	kg	39	41	39	39	41
Conformity	-	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC