


# NXT30


## Door- or wall-mount air conditioners

COOLING CAPACITY 3000 W

### DIMENSIONS

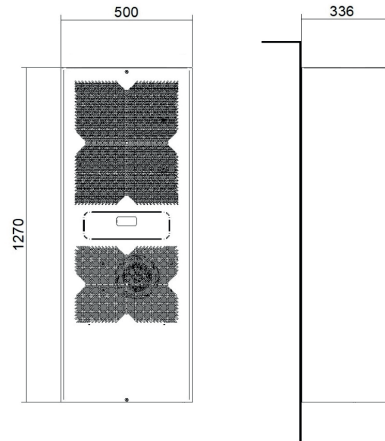

### PERFORMANCE

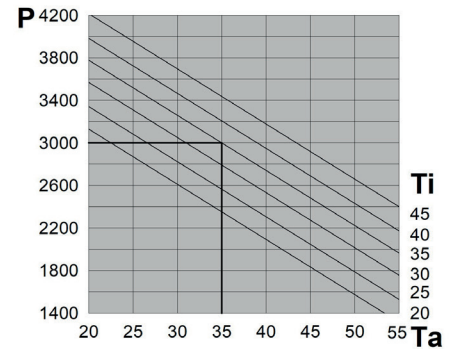

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Features	UoM	NXT30B0E1C0000	NXT30H0E1C0000	NXT30B0E1U0000	NXT30H0E1U0000
Cooling capacity EN14511 - A35A35	W	3000	3000	3000	3000
Cooling capacity EN14511 - A35A50	W	2210	2210	2210	2210
Power supply	V ~ Hz	230 - 1 - 50/60	400/3/50 - 460/3/60	230 - 1 - 50/60	400/3/50 - 460/3/60
Width - Height - Depth	mm	500 - 1270 - 336	500 - 1270 - 336	500 - 1270 - 336	500 - 1270 - 336
Max current	A	5.2	2.4	5.2	2.4
Inrush current	A	35	20	35	20
T Fuse	A	10	6	10	6
Power draw EN14511 - A35A35	W	1190	1140	1190	1140
Power draw EN14511 - A35A50	W	1380	1350	1380	1350
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m <sup>3</sup> /h	1500	1500	1500	1500
Internal temperature range	°C	20-45	20-45	20-45	20-45
Temperature regulation	-	TX-i40 electronic thermostat factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
Ingress protection cabinet side	-	IP55	IP55	NEMA TYPE 12	NEMA TYPE 12
Noise level	dB (A)	70	70	70	70
Weight	kg	84	85	84	85
Conformity	-	CE UK EAC	CE UK EAC	UL CE UK EAC	UL CE UK EAC