



**ORELL**

# PRESSURE- FILTERS PE



## MATERIALS

Head:  
Aluminium alloy

Spin-on cartridge:  
Steel

Bypass valve:  
Polyamide

Seals:  
NBR Nitrile  
(FKM - on request fluoro-  
elastomer)

Indicator housing:  
Brass

## PRESSURE (ISO 10771-1:2002)

Max working:  
1,2 MPa (12 bar)

Test:  
1,5 MPa (15 bar)

Bursting:  
2,5 MPa (25 bar)

Collapse, differential  
for the filter element (ISO 2941):  
400 kPa (4 bar)

## BYPASS VALVE

Setting:  
170 kPa (1,7 bar)  $\pm$  10%

## WORKING TEMPERATURE

From -25° to +110° C

## COMPATIBILITY (ISO 2943:1999)


Full with fluids:  
HH-HL-HM-HR-HV-HTG  
(according to ISO 6743/4)  
For fluids different than the above  
mentioned, please contact our  
Sales Department.

## APPLICATION EXAMPLE




**OHF 340**


FPE 1+ & FPE 2+

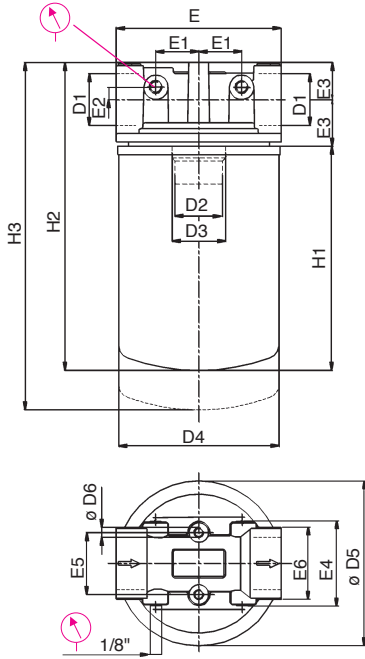

FPE 3+

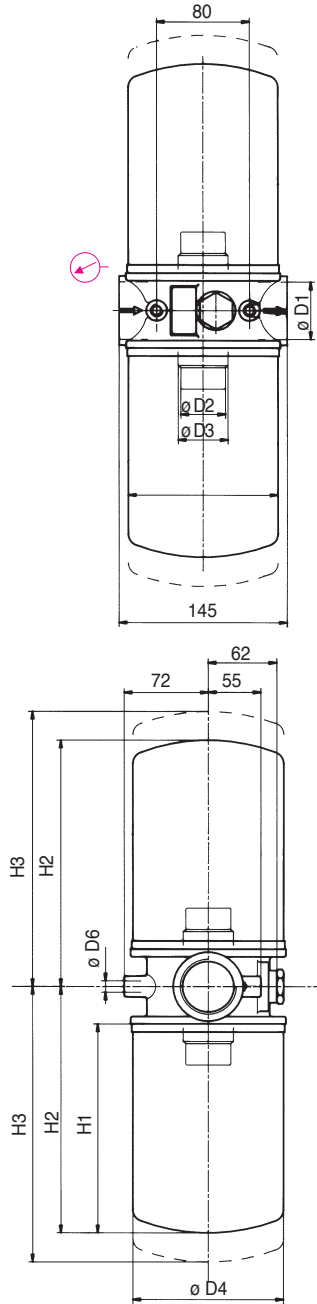

FPE 4+

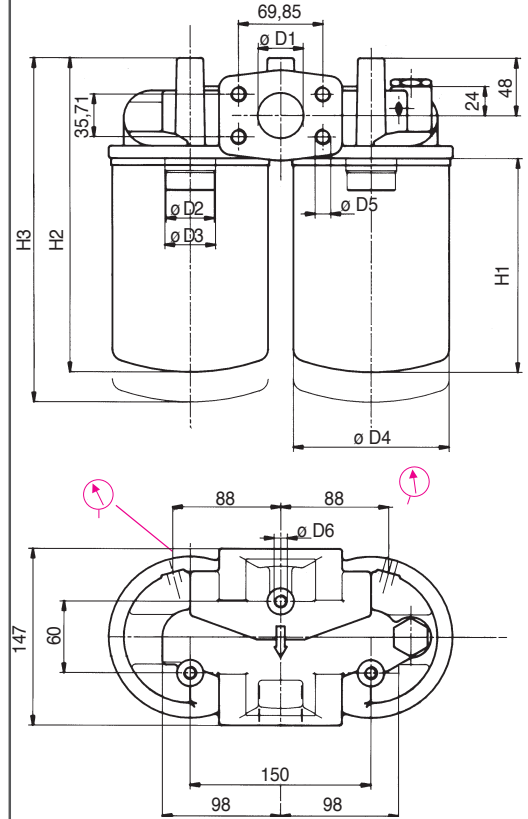


## FILTER HOUSING

|       | D1     | D2           | D3         | D4  | D5  | D6  | E   | E1   | E2 | E3 | E4 | E5 | E6 | H1  | H2  | H3  | kg  |
|-------|--------|--------------|------------|-----|-----|-----|-----|------|----|----|----|----|----|-----|-----|-----|-----|
| FPE11 | 3/4"   | 3/4" BSP     | -          | 96  | 96  | M8  | 95  | 20,5 | 7  | 20 | 49 | 38 | 37 | 145 | 188 | 208 | 1,2 |
| FPE12 | 3/4"   | 3/4" BSP     | -          | 96  | 96  | M8  | 95  | 20,5 | 7  | 20 | 49 | 38 | 37 | 191 | 234 | 254 | 1,5 |
| FPE21 | 1" 1/4 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | 134 | M8  | 133 | 35   | 10 | 30 | 64 | 50 | 57 | 181 | 248 | 278 | 1,9 |
| FPE31 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | -   | M10 | -   | -    | -  | -  | -  | -  | -  | 181 | 216 | 246 | 3,6 |
| FPE41 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | M12 | M10 | -   | -    | -  | -  | -  | -  | -  | 181 | 269 | 299 | 4,8 |
| FPE22 | 1" 1/4 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | 134 | M8  | 133 | 35   | 10 | 30 | 64 | 50 | 57 | 226 | 293 | 323 | 2,0 |
| FPE32 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | -   | M10 | -   | -    | -  | -  | -  | -  | -  | 226 | 261 | 291 | 3,8 |
| FPE42 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | M12 | M10 | -   | -    | -  | -  | -  | -  | -  | 226 | 314 | 344 | 5,0 |

|   |   |   |  |  |  |  |  |  |  |                         |  |
|---|---|---|--|--|--|--|--|--|--|-------------------------|--|
|   |   | <b>TYPE</b>                             |  |  |  |  |  |  |  |                         |  |
|   |   | F = FILTER COMPLETE                     |  |  |  |  |  |  |  | F F F F F F F F         |  |
|   |   | B = FILTER HOUSING                      |  |  |  |  |  |  |  | B B B B B B B B         |  |
| P | E | <b>FAMILY NOMINAL SIZE &amp; LENGTH</b> |  |  |  |  |  |  |  | <b>ELEMENT</b>          |  |
|   |   | 11 12 21 22 31 32 41 42                 |  |  |  |  |  |  |  | S E                     |  |
|   |   | <b>PORT TYPE</b>                        |  |  |  |  |  |  |  |                         |  |
|   |   | B = BSP thread                          |  |  |  |  |  |  |  | B B B B B B B B         |  |
|   |   | F = SAE flange 3000 psi                 |  |  |  |  |  |  |  | - - - - - - - F F       |  |
|   |   | <b>PORT SIZE</b>                        |  |  |  |  |  |  |  |                         |  |
|   |   | 06 = 3/4                                |  |  |  |  |  |  |  | 06 06 - - - - - -       |  |
|   |   | 10 = 1" 1/4                             |  |  |  |  |  |  |  | - - 10 10 - - - - -     |  |
|   |   | 12 = 1" 1/2                             |  |  |  |  |  |  |  | - - - - 12 12 12 12     |  |
|   |   | <b>BYPASS VALVE</b>                     |  |  |  |  |  |  |  |                         |  |
|   |   | W = without                             |  |  |  |  |  |  |  | W W W W W W W W         |  |
|   |   | B = 170 kPa (1,7 bar)                   |  |  |  |  |  |  |  | B B B B B B B B         |  |
|   |   | <b>SEALS</b>                            |  |  |  |  |  |  |  | <b>SEALS</b>            |  |
|   |   | N = NBR Nitrile                         |  |  |  |  |  |  |  | N N N N N N N N         |  |
|   |   | F = FKM Fluoroelastomer                 |  |  |  |  |  |  |  | F F F F F F F F         |  |
|   |   | <b>FILTER MEDIA</b>                     |  |  |  |  |  |  |  | <b>FILTER MEDIA</b>     |  |
|   |   | FA = fiber 5 μm <sub>(e)</sub> β>1.000  |  |  |  |  |  |  |  | FA FA FA FA FA FA FA FA |  |
|   |   | FB = fiber 7 μm <sub>(e)</sub> β>1.000  |  |  |  |  |  |  |  | FB FB FB FB FB FB FB FB |  |
|   |   | FC = fiber 12 μm <sub>(e)</sub> β>1.000 |  |  |  |  |  |  |  | FC FC FC FC FC FC FC FC |  |
|   |   | FD = fiber 21 μm <sub>(e)</sub> β>1.000 |  |  |  |  |  |  |  | FD FD FD FD FD FD FD FD |  |
|   |   | CC = cellulose 10 μm β>2                |  |  |  |  |  |  |  | CC CC CC CC CC CC CC CC |  |
|   |   | CD = cellulose 25 μm β>2                |  |  |  |  |  |  |  | CD CD CD CD CD CD CD CD |  |
|   |   | <b>CLOGGING INDICATOR</b>               |  |  |  |  |  |  |  |                         |  |
|   |   | 06 = 1/8" ports, plugged                |  |  |  |  |  |  |  | 06 06 06 06 06 06 06 06 |  |
|   |   | 31 = pressure gauge, rear connection    |  |  |  |  |  |  |  | 31 31 31 31 31 31 31 31 |  |
|   |   | P1 = SPDT, pressure switch              |  |  |  |  |  |  |  | P1 P1 P1 P1 P1 P1 P1 P1 |  |
| X | X | <b>ACCESSORIES</b>                      |  |  |  |  |  |  |  |                         |  |
|   |   | XX = no accessory available             |  |  |  |  |  |  |  | XX XX XX XX XX XX XX XX |  |


NOTE:  
ESE31+++ = nr. 2 x ESE21+++  
ESE32+++ = nr. 2 x ESE22+++  
ESE41+++ = nr. 2 x ESE21+++  
ESE42+++ = nr. 2 x ESE22+++

| FILTER ELEMENT |      |               |     |      |                         |          |
|----------------|------|---------------|-----|------|-------------------------|----------|
|                | A    | B             | C   | kg   | Area (cm <sup>2</sup> ) |          |
|                |      |               |     |      | Media F+                | Media C+ |
| ESE11          | 96,5 | 3/4" BSP      | 146 | 0,70 | 2.140                   | 3.305    |
| ESE12          | 96,5 | 3/4" BSP      | 191 | 0,80 | 3.630                   | 4.745    |
| ESE21          | 129  | 1" 1/4<br>BSP | 181 | 1,20 | 4.450                   | 5.560    |
| ESE22          | 129  | 1" 1/4<br>BSP | 226 | 1,40 | 5.890                   | 7.360    |

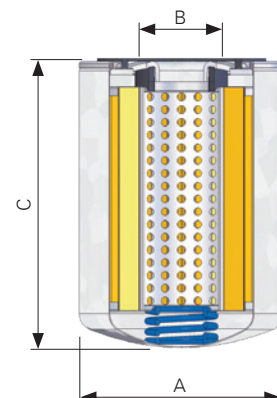


VERSION WITH DIFFERENTIAL INDICATOR


FPE A+ & FPE B+

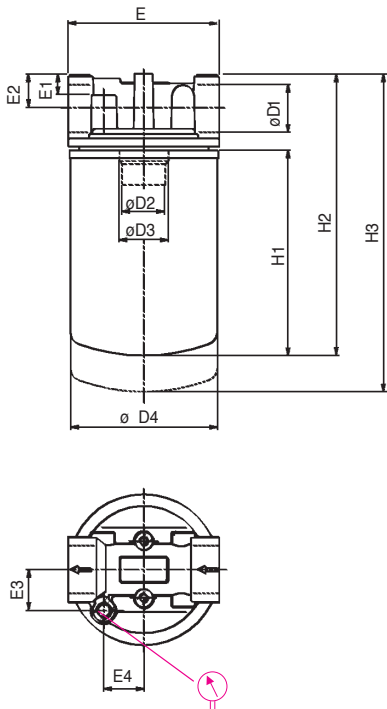

FPE 3+

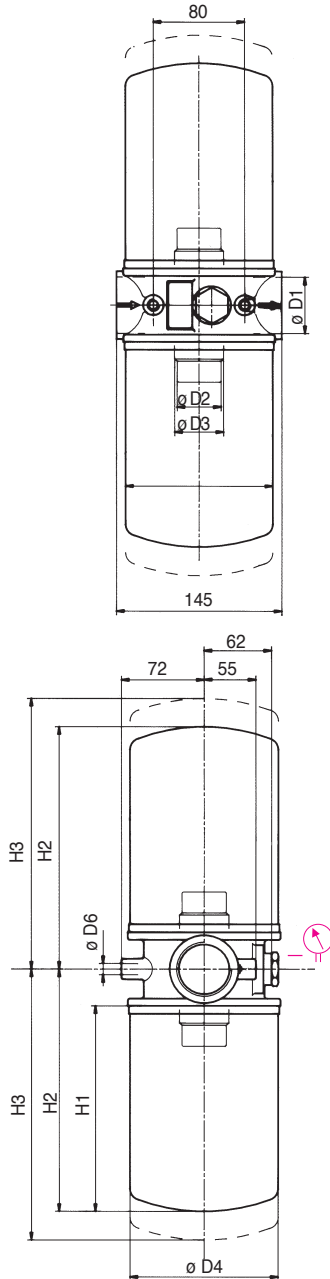

FPE 4+

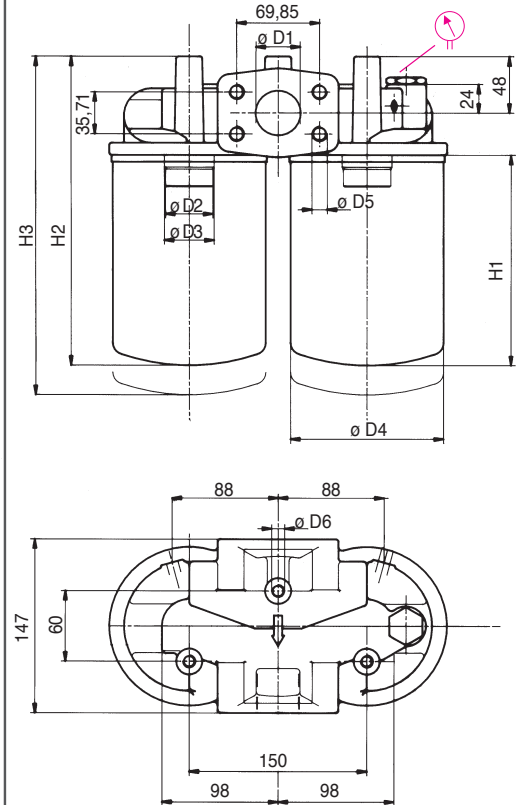

FILTER HOUSING


|       | D1     | D2           | D3         | D4  | D5  | D6  | E   | E1 | E2 | E3   | E4   | E5 | E6 | H1  | H2  | H3  | kg  |
|-------|--------|--------------|------------|-----|-----|-----|-----|----|----|------|------|----|----|-----|-----|-----|-----|
| FPEA1 | 3/4"   | 3/4" BSP     | -          | 96  | 96  | M8  | 95  | -  | 23 | 24,5 | 21,5 | 38 | 32 | 145 | 188 | 208 | 1,2 |
| FPEA2 | 3/4"   | 3/4" BSP     | -          | 96  | 96  | M8  | 95  | -  | 23 | 24,5 | 21,5 | 38 | 32 | 191 | 234 | 254 | 1,5 |
| FPEB1 | 1" 1/4 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | 134 | M8  | 133 | 19 | 30 | 36   | 35   | 50 | 54 | 181 | 248 | 278 | 1,9 |
| FPE31 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | -   | M10 | -   | -  | -  | -    | -    | -  | -  | 181 | 216 | 246 | 3,6 |
| FPE41 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | M12 | M10 | -   | -  | -  | -    | -    | -  | -  | 181 | 269 | 299 | 4,8 |
| FPEB2 | 1" 1/4 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | 134 | M8  | 133 | 19 | 30 | 36   | 35   | 50 | 54 | 226 | 293 | 323 | 2,0 |
| FPE32 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | -   | M10 | -   | -  | -  | -    | -    | -  | -  | 226 | 261 | 291 | 3,8 |
| FPE42 | 1" 1/2 | 1" 1/2 16-UN | 1" 1/4 BSP | 129 | M12 | M10 | -   | -  | -  | -    | -    | -  | -  | 226 | 314 | 344 | 5,0 |

VERSION WITH DIFFERENTIAL INDICATOR

|  |                                  |    |    |    |    |    |    |    |    |   |  |
|--|----------------------------------|----|----|----|----|----|----|----|----|---|--|
| <b>TYPE</b>  |                                  |    |    |    |    |    |    |    |    |   |  |
| F = FILTER COMPLETE                                      |                                  | F  | F  | F  | F  | F  | F  | F  | F  |   |  |
| B = FILTER HOUSING                                       |                                  | B  | B  | B  | B  | B  | B  | B  | B  | <b>ELEMENT</b> E  |  |
| <b>P E</b>   | <b>FAMILY</b>                    |    |    |    |    |    |    |    |    | <b>FAMILY</b>   |  |
|  | <b>NOMINAL SIZE &amp; LENGTH</b> | A1 | A2 | B1 | B2 | 31 | 32 | 41 | 42 | <b>SIZE &amp; LENGTH</b> S E  |  |
| <b>PORT TYPE</b>   |                                  |    |    |    |    |    |    |    |    |   |  |
| B = BSP thread   |                                  | B  | B  | B  | B  | B  | B  | B  | B  |   |  |
| F = SAE flange 3000 psi                                  |                                  | -  | -  | -  | -  | -  | -  | F  | F  |   |  |
| <b>PORT SIZE</b>   |                                  |    |    |    |    |    |    |    |    |   |  |
| 06 = 3/4   |                                  | 06 | 06 | -  | -  | -  | -  | -  | -  | NOTE:<br>ESEA1+++ = ESE11+++<br>ESEA2+++ = ESE12+++<br>ESEB1+++ = ESE21+++<br>ESEB2+++ = ESE22+++<br>ESE31+++ = nr. 2 x ESE21+++<br>ESE32+++ = nr. 2 x ESE22+++<br>ESE41+++ = nr. 2 x ESE21+++<br>ESE42+++ = nr. 2 x ESE22+++ |  |
| 10 = 1" 1/4  |                                  | -  | -  | 10 | 10 | -  | -  | -  | -  |   |  |
| 12 = 1" 1/2  |                                  | -  | -  | -  | -  | 12 | 12 | 12 | 12 |   |  |
| <b>BYPASS VALVE</b>                                      |                                  |    |    |    |    |    |    |    |    |   |  |
| W = without  |                                  | W  | W  | W  | W  | W  | W  | W  | W  |   |  |
| B = 170 kPa (1,7 bar)                                    |                                  | B  | B  | B  | B  | B  | B  | B  | B  |   |  |
| <b>SEALS</b>   |                                  |    |    |    |    |    |    |    |    | <b>SEALS</b>  |  |
| N = NBR Nitrile  |                                  | N  | N  | N  | N  | N  | N  | N  | N  | N = NBR   |  |
| F = FKM Fluoroelastomer                                  |                                  | F  | F  | F  | F  | F  | F  | F  | F  | F = FKM   |  |
| <b>FILTER MEDIA</b>                                      |                                  |    |    |    |    |    |    |    |    | <b>FILTER MEDIA</b>   |  |
| FA = fiber 5 μm <sub>(c)</sub> β>1.000                   |                                  | FA | FA | FA | FA | FA | FA | FA | FA | FA = fiber 5 μm <sub>(c)</sub>  |  |
| FB = fiber 7 μm <sub>(c)</sub> β>1.000                   |                                  | FB | FB | FB | FB | FB | FB | FB | FB | FB = fiber 7 μm <sub>(c)</sub>  |  |
| FC = fiber 12 μm <sub>(c)</sub> β>1.000                  |                                  | FC | FC | FC | FC | FC | FC | FC | FC | FC = fiber 12 μm <sub>(c)</sub>   |  |
| FD = fiber 21 μm <sub>(c)</sub> β>1.000                  |                                  | FD | FD | FD | FD | FD | FD | FD | FD | FD = fiber 21 μm <sub>(c)</sub>   |  |
| CC = cellulose 10 μm β>2                                 |                                  | CC | CC | CC | CC | CC | CC | CC | CC | CC = cellulose 10 μm  |  |
| CD = cellulose 25 μm β>2                                 |                                  | CD | CD | CD | CD | CD | CD | CD | CD | CD = cellulose 25 μm  |  |
| <b>CLOGGING INDICATOR</b>                                |                                  |    |    |    |    |    |    |    |    |   |  |
| 03 = ports, plugged                                      |                                  | -  | -  | -  | -  | 03 | 03 | 03 | 03 | When the filter is ordered with FKM seals, the first digit of the indicator code is a letter (please see page 182 - 183).   |  |
| 5B = visual differential 130 kPa (1,3 bar)               |                                  | -  | -  | -  | -  | 5B | 5B | 5B | 5B |   |  |
| 6B = electrical differential 130 kPa (1,3 bar)           |                                  | -  | -  | -  | -  | 6B | 6B | 6B | 6B |   |  |
| 7B = indicator 6B with LED                               |                                  | -  | -  | -  | -  | 7B | 7B | 7B | 7B |   |  |
| T0 = elect. diff. 130 kPa (1,3 bar) with thermostat 30°C |                                  | -  | -  | -  | -  | T0 | T0 | T0 | T0 |   |  |
| 0U = ports, plugged                                      |                                  | 0U | 0U | 0U | 0U | -  | -  | -  | -  |   |  |
| U0 = differential, visual, 130 kPa (1,3 bar)             |                                  | U0 | U0 | U0 | U0 | -  | -  | -  | -  |   |  |
| N0 = differ. vis-electrical, 130 kPa (1,3 bar)           |                                  | N0 | N0 | N0 | N0 | -  | -  | -  | -  |   |  |
| <b>X X</b>   | <b>ACCESSORIES</b>               |    |    |    |    |    |    |    |    |   |  |
|  | XX = no accessory available      | XX | XX | XX | XX | XX | XX | XX | XX | N.B.<br>Indicator series 70 only on request   |  |


**FILTER ELEMENT**

|       | A    | B             | C   | kg   | Area (cm <sup>2</sup> ) |          |
|-------|------|---------------|-----|------|-------------------------|----------|
|       |      |               |     |      | Media F+                | Media C+ |
| ESE11 | 96,5 | 3/4" BSP      | 146 | 0,70 | 2.140                   | 3.305    |
| ESE12 | 96,5 | 3/4" BSP      | 191 | 0,80 | 3.630                   | 4.745    |
| ESE21 | 129  | 1" 1/4<br>BSP | 181 | 1,20 | 4.450                   | 5.560    |
| ESE22 | 129  | 1" 1/4<br>BSP | 226 | 1,40 | 5.890                   | 7.360    |

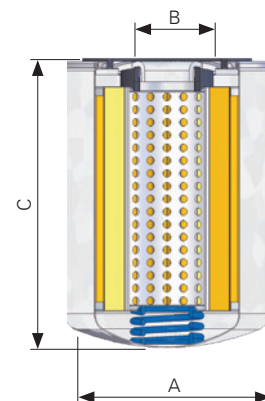

### FLUID SPEED


when selecting the filter size, we suggest to consider also the max recommended fluid speed (in pressure lines normally  $5 < v < 10$  m/s).

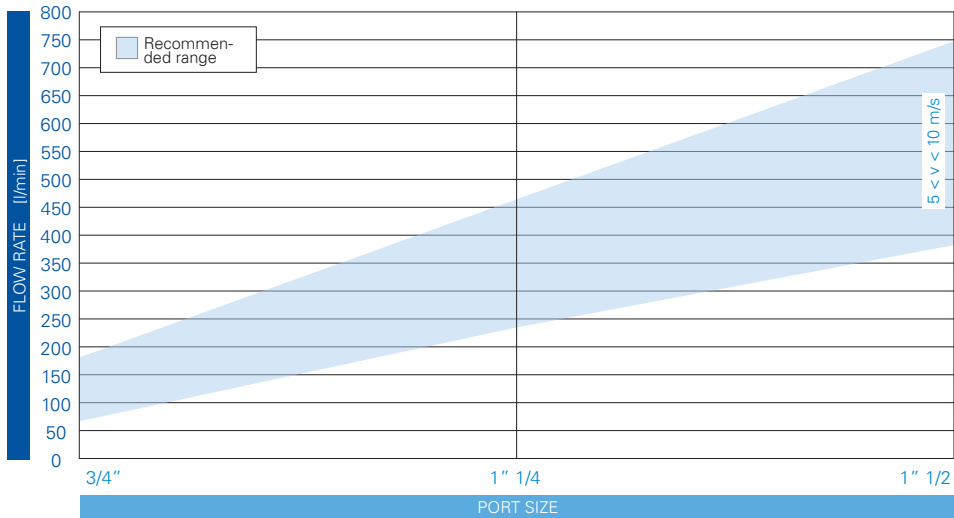

### PRESSURE DROP CURVES ( $\Delta p$ )

The "Assembly Pressure Drop ( $\Delta p$ )" is obtained by adding the pressure drop values of the Filter Housing and of the Clean Filter Element corresponding to the considered Flow Rate and it must be lower than 50 kPa (0,5 bar).

### FILTER HOUSING PRESSURE DROP (mainly depending on the port size)




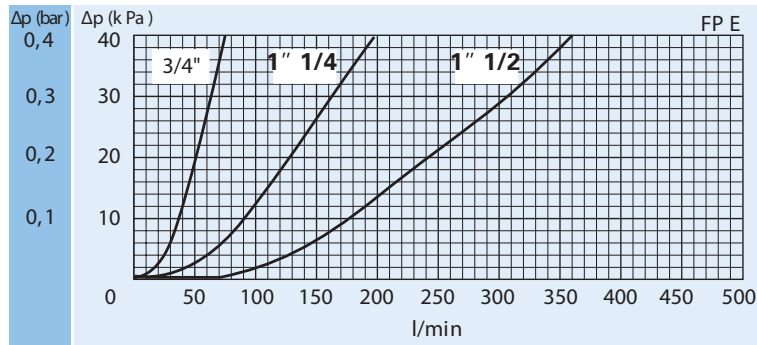


**PRESSURE DROP CURVES ( $\Delta p$ )**

The "Assembly Pressure Drop ( $\Delta p$ )" is obtained by adding the pressure drop values of the Filter Housing and of the Clean Filter Element corresponding to the considered Flow Rate and it must be lower than 50 kPa (0,5 bar).

**CLEAN FILTER ELEMENT PRESSURE DROP WITH F+ AND C+ MEDIA**



(depending both on the internal diameter of the element and on the filter media)

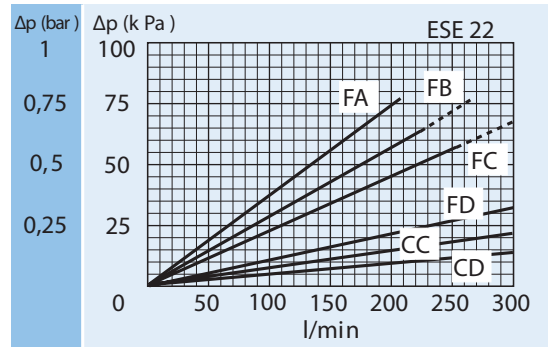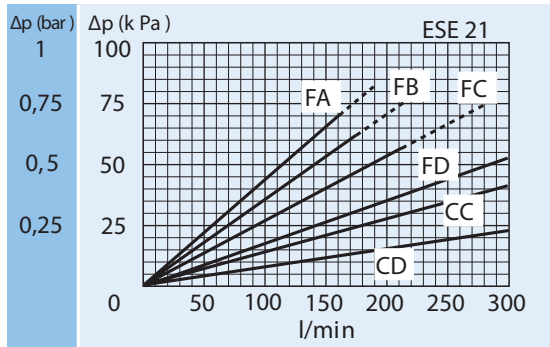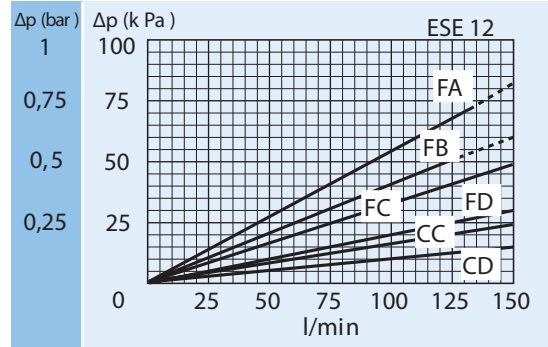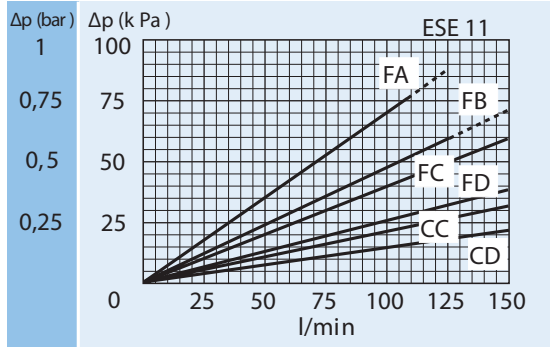

FPE3+ and FPE4+ filters use double element canisters. The Assembly Pressure Drop is therefore determined by adding the Housing Pressure Drop at the real flow rate and half the pressure drop of the ESE2+ element. E.g. The pressure drop of a complete FPE31—FC— filter at a 60 l/min flow rate is obtained by adding the Housing Pressure Drop and half the ESE21NFC element pressure drop at 60 l/min.

**BYPASS VALVE PRESSURE DROP**

When selecting the filter size, these curves must be taken into account if it is foreseen that any flow peak is to be absorbed by the bypass valve, it also must be of proper configuration to avoid pressure peaks. The valve pressure drop is directly proportional to fluid specific gravity.

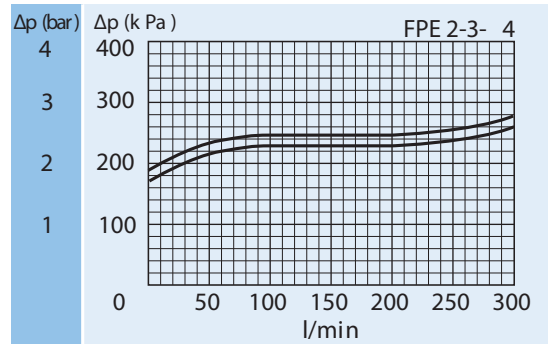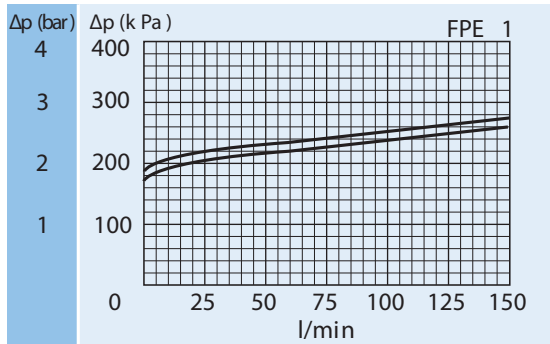

N.B. All the curves have been obtained with mineral oil having a kinematic viscosity 30 cSt and specific gravity 0,9 kg/dm<sup>3</sup>; for fluids with different features, please consider the factors described in the first part of this catalogue.



**CLOGGING INDICATOR**

A visual or electrical indicator is available as an option and allows monitoring of the element conditions, giving an indication of the right time to replace the element.

**BYPASS VALVE**

In the head, a full-flow bypass valve can be mounted as an option; the bypass flow is designed in such a way that the contaminant is retained in the filter element during bypass conditions.

**"LONG LIFE" FILTER ELEMENT**

The filter elements are designed with a very large filter area giving a highest dirt holding capacity.

**EASY MAINTENANCE**


The spin-on cartridge filter element allows a easy and quick replacement of the element itself.

**STRONG CONSTRUCTION**

The materials and the design ensure a superior resistance to fatigue even at working pressures up to 1.200 kPa (12 bar).

**CLOGGING INDICATOR**

For further technical informations and other options see page 182-183.

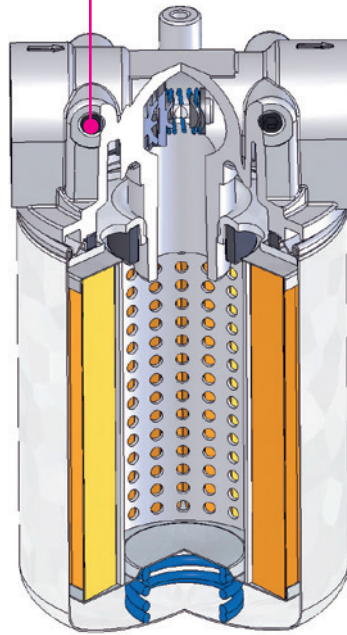

| FILTER HOUSING   | FILTER ELEMENT | CLOGGING INDICATOR |   |  |  |  |  |  |  |   |   |   |  |   |   |   |  |  |  |  |  |  |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |
|--|----------------|--------------------|---|--|--|--|--|--|--|---|---|---|--|---|---|---|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|--|--|--|
|  |                |                    |   |  |  |  |  |  |  |   |   |   |  |   |   |   |  |  |  |  |  |  |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |
| <table border="1"> <tr> <td>B</td><td>P</td><td>E</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>X</td><td>X</td> </tr> </table> | B              | P                  | E |  |  |  |  |  |  |   | X | X | <table border="1"> <tr> <td>E</td><td>S</td><td>E</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> | E | S | E |  |  |  |  |  |  |  |  |  | <table border="1"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> |  |  |  |  |  |  |  |  |  |  |  |  |
| B  | P              | E                  |   |  |  |  |  |  |  | X | X |   |  |   |   |   |  |  |  |  |  |  |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |
| E  | S              | E                  |   |  |  |  |  |  |  |   |   |   |  |   |   |   |  |  |  |  |  |  |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |
|  |                |                    |   |  |  |  |  |  |  |   |   |   |  |   |   |   |  |  |  |  |  |  |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |

**SPARE PARTS ELEMENTS**  
(For filling up see table "Ordering and option chart")




VERSION WITH DIFFERENTIAL INDICATOR

**CLOGGING INDICATOR**  
A visual or visual-electrical differential indicator is available as an option and allows monitoring of the element conditions, giving an exact indication of the right time to replace the element.

**BYPASS VALVE**  
In the head, a full-flow bypass valve can be mounted as an option; the bypass flow is designed in such a way that the contaminant is retained in the filter element during bypass conditions.


**"LONG LIFE" FILTER ELEMENT**  
The filter elements are designed with a very large filter area giving a highest dirt holding capacity.

**CLOGGING INDICATOR**  
For further technical informations and other options see page 182-183.

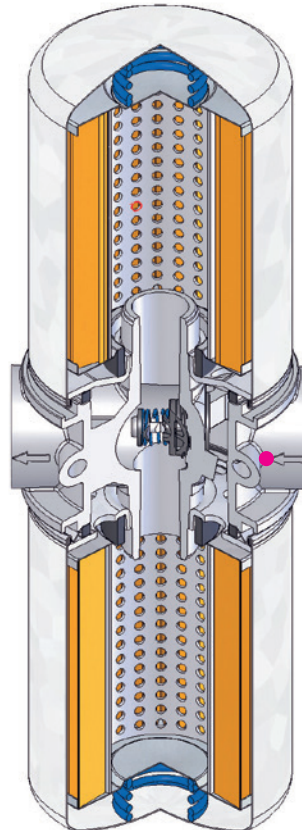

**EASY MAINTENANCE**  
The spin-on cartridge filter element allows a easy and quick replacement of the element itself.

**STRONG CONSTRUCTION**  
The materials and the design ensure a superior resistance to fatigue even at working pressures up to 1.200 kPa (12 bar).

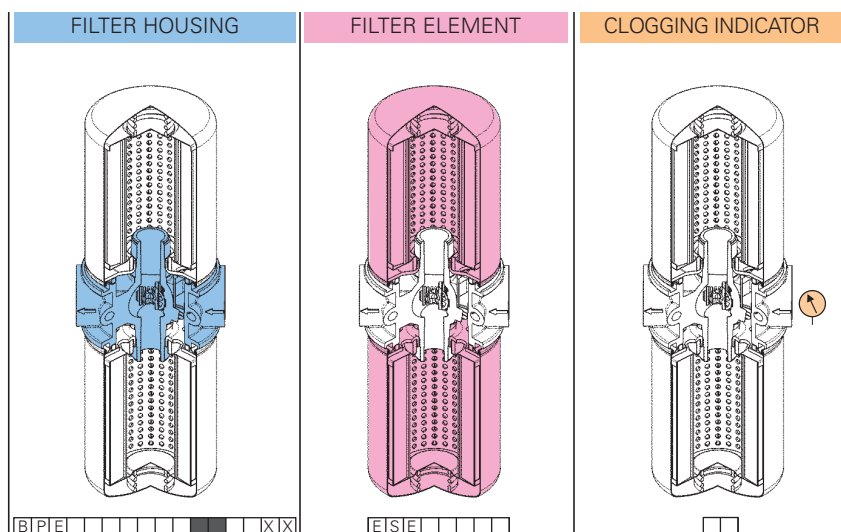

**SPARE PARTS ELEMENTS**  
(For filling up see table "Ordering and option chart")

Technical data subject to variations without prior notice. PE - EN - 04/2011